



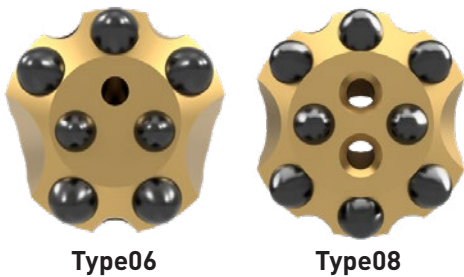

TAPERED BIT

TAPERED BIT

HEX 22 SERIES

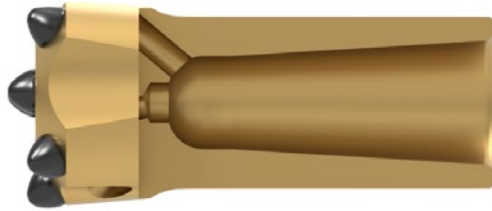

Type06

Type08

Hex	Taper angle	Rod point dia.(d)	Type	Taper Style
22	4°46'	19.1	T22E	Long
22	7°	16	T22F	Long
22	11°	17.7	T22G	Short
22	11°	15.5	T22D	Long
22	12°	15.5	T22C	Long

Hex 22 4° 46' Tapered bit for long skirt



Part Number	Gauge Diameter		Length		Gauge Angle[°]	Gauge Button	Face Button	Blow hole		Weight
	(mm)	(in)	(mm)	(in)		No×Dia	No×Dia	Side	Face	
T22P33EBB065Z	33	1 5/16"	70	2 3/4"	35	5 × φ7	2 × φ7	1	1	0.3
T22P35EBB065	35	1 3/8"	75	2 61/64"	35	5 × φ8	2 × φ8	1	2	0.3
T22P40EBB065	40	1 9/16"	75	2 61/64"	35	5 × φ8	2 × φ8	1	1	0.4
T22P43EBB065	43	1 11/16"	75	2 61/64"	35	5 × φ9	2 × φ9	1	2	0.5

Hex 22 7° Tapered bit for long skirt



Part Number	Gauge Diameter		Length		Gauge Angle[°]	Gauge Button	Face Button	Blow hole		Weight
	(mm)	(in)	(mm)	(in)		No×Dia	No×Dia	Side	Face	
T22P30FBB065Z	30	1 3/16"	75	2 61/64"	35	5 × φ7	2 × φ6	1	2	0.2
T22P31FBB065Z	31	1 7/32"	75	2 61/64"	35	5 × φ7	2 × φ7	1	2	0.3
T22P32FBB065Z	32	1 1/4"	75	2 61/64"	35	5 × φ7	2 × φ7	1	2	0.3
T22P33FBB065Z	33	1 5/16"	75	2 61/64"	35	5 × φ7	2 × φ7	1	2	0.3
T22P34FBB065Z	34	1 11/32"	75	2 61/64"	35	5 × φ7	2 × φ7	1	2	0.3
T22P36FBB065Z	36	1 13/32"	75	2 61/64"	40	5 × φ8	2 × φ7	1	1	0.3
T22P38FBB065Z	38	1 1/2"	75	2 61/64"	40	5 × φ8	2 × φ8	1	1	0.4
T22P40FBB065Z	40	1 9/16"	75	2 61/64"	40	5 × φ9	2 × φ8	1	1	0.4

Hex 22 11° Tapered bit for short skirt



Part Number	Gauge Diameter		Length		Gauge Angle[°]	Gauge Button	Face Button	Blow hole		Weight
	(mm)	(in)	(mm)	(in)		No×Dia	No×Dia	Side	Face	
T22P32GBB065Z	32	1 1/4"	55	2 11/64"	35	5 × φ7	2 × φ7	1	2	0.3
T22P33GBB065Z	33	1 5/16"	50	1 31/32"	40	5 × φ7	2 × φ7	1	1	0.3
T22P35GBB065Z2	35	1 3/8"	55	2 11/64"	40	5 × φ7	2 × φ7	1	1	0.3
T22P36GBB065Z2	36	1 13/32"	50	1 31/32"	40	5 × φ8	2 × φ7	1	1	0.3
T22P38GBB065Z2	38	1 1/2"	50	1 31/32"	40	5 × φ9	2 × φ7	1	1	0.3
T22P40GBB065Z1	40	1 9/16"	50	1 31/32"	40	5 × φ9	2 × φ8	1	1	0.4
T22P41GBB065Z3	41	1 5/8"	50	1 31/32"	40	5 × φ9	2 × φ8	1	1	0.4
T22P42GBB065Z	42	1 21/32"	50	1 31/32"	40	5 × φ9	2 × φ9	1	2	0.6

Hex 22 11° Tapered bit for long skirt



Part Number	Gauge Diameter		Length		Gauge Angle[°]	Gauge Button	Face Button	Blow hole		Weight
	(mm)	(in)	(mm)	(in)		No×Dia	No×Dia	Side	Face	
T22P32DBB065	32	1 1/4"	65	2 9/16"	35	5 × φ7	2 × φ7	1	1	0.3
T22P33DBB065Z	33	1 5/16"	65	2 9/16"	40	5 × φ7	2 × φ7	1	1	0.3
T22P34DBB065Z	34	1 11/32"	65	2 9/16"	40	5 × φ7	2 × φ7	1	1	0.3
T22P35DBB065Z1	35	1 3/8"	65	2 9/16"	40	5 × φ7	2 × φ7	1	1	0.3
T22P36DBB065Z1	36	1 13/32"	65	2 9/16"	40	5 × φ8	2 × φ7	1	1	0.3
T22P38DBB065Z1	38	1 1/2"	65	2 9/16"	40	5 × φ8	2 × φ8	1	1	0.3
T22P40DBB065Z	40	1 9/16"	70	2 3/4"	40	5 × φ9	2 × φ8	1	1	0.4
T22P41DBB065Z	41	1 5/8"	65	2 9/16"	40	5 × φ9	2 × φ8	1	1	0.4


Hex 22 12° Tapered bit for long skirt



Part Number	Gauge Diameter		Length		Gauge Angle[°]	Gauge Button	Face Button	Blow hole		Weight
	(mm)	(in)	(mm)	(in)		No×Dia	No×Dia	Side	Face	
T22P32CBB065Z	32	1 1/4"	65	2 9/16"	35	5 × φ7	2 × φ7	1	1	0.2
T22P33CBB065	33	1 5/16"	70	2 3/4"	35	5 × φ7	2 × φ7	1	1	0.3
T22P35CBB065Z	35	1 3/8"	65	2 9/16"	35	5 × φ9	2 × φ7	1	1	0.4
T22P38CBB065	38	1 1/2"	70	2 3/4"	35	5 × φ8	2 × φ8	1	1	0.4
T22P41CBB065Z	41	1 5/8"	65	2 9/16"	40	5 × φ9	2 × φ8	1	1	0.4
T22P32CBB084	32	1 1/4"	70.5	2 25/32"	40	6 × φ7	2 × φ7	2	1	0.3
T22P33CBB084	33	1 5/16"	70.5	2 25/32"	40	6 × φ7	2 × φ7	2	1	0.3
T22P35CBB08Z	35	1 3/8"	70	2 3/4"	40	6 × φ8	2 × φ7	2	2	0.4

TAPERED BIT

HEX 25 SERIES

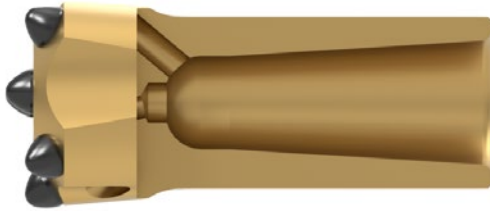

Type06

Hex	Taper angle	Rod point dia.(d)	Type	Taper Style
25	7°	20	T25B	Long
25	7°	21.2	T25F	Short

Hex 25 7° Tapered bit for long skirt



Part Number	Gauge Diameter		Length		Gauge Angle(°)	Gauge Button	Face Button	Blow hole		Weight
	(mm)	(in)	(mm)	(in)		No×Dia	No×Dia	Side	Face	
T25P38BBB065Z	38	1 1/2"	75	2 61/64"	40	5 × φ8	2 × φ8	1	2	0.4
T25P40BBB065Z	40	1 9/16"	75	2 61/64"	40	5 × φ8	2 × φ8	1	2	0.5
T25P41BBB065Z	41	1 5/8"	75	2 61/64"	40	5 × φ9	2 × φ8	1	2	0.5
T25P43BBB06Z	43	1 11/16"	75	2 61/64"	40	5 × φ9	2 × φ9	1	2	0.5

Hex 25 7° Tapered bit for short skirt



Part Number	Gauge Diameter		Length		Gauge Angle(°)	Gauge Button	Face Button	Blow hole		Weight
	(mm)	(in)	(mm)	(in)		No×Dia	No×Dia	Side	Face	
T25P41FBB065Z	41	1 5/8"	60	2 23/64"	40	5 × φ9	2 × φ8	1	2	0.4
T25P43FBB065Z	43	1 11/16"	60	2 23/64"	40	5 × φ10	3 × φ9	1	2	0.4